

INSTALLATION INSTRUCTIONS



BOBRICK MODEL B-2220 FOLDING CHILD SEAT

Mounting Hardware:

- 1 each Child Seat
- 4 each 1/4-20 x 1-3/4" (M6-1 x 44mm)
- 4 each 1/4" 6.4mm) Fender Washers
- 4 each Cap Nuts

Important Note:

The enclosed hardware is for partition only. If you prefer to mount unit directly to the wall, please use appropriate hardware to do so.

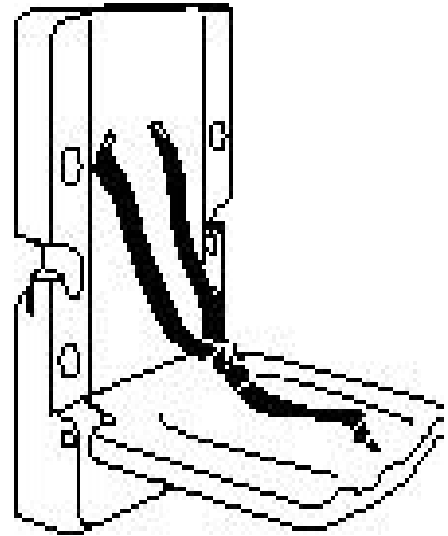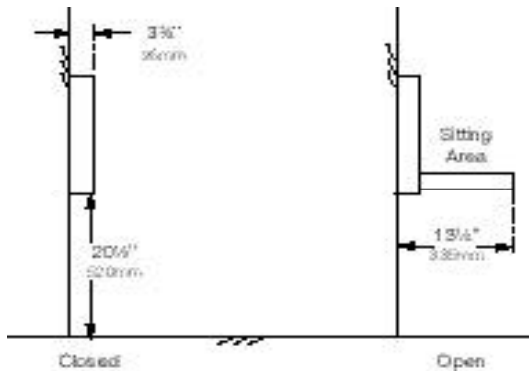

The Child Seat has been designed to fit into even the smallest of washroom or changing room stalls.

INSTALLATION:

Unit should be mounted in a convenient location at or near the same height as the toilet tissue dispenser in a toilet compartment. If mounting in a changing room, mount so bottom of unit is approximately 20-1/2" (52cm) from the floor. Be sure that there is enough clearance for the door to open and close when the seat is in the closed position.

Use the Child Seat as a template to mark holes for drilling.

Using a 9/32" 7 bit, drill holes in partition at mounting points.

Place 1/4" (6.4mm) fender washers on 1-3/4" (44mm) machine screws.

Insert machine screws with washers through holes in Child Seat into drilled holes.

Place cap nut on machine screws and tighten securely.

Put pressure on seat to make certain the seat is securely attached.

Be sure to check mounting hardware at least once a month to ensure that screws are tightly fastened.

The Child Seat can be easily cleaned with a mild, soapy water solution or with a mild glass or counter cleaner. Do not use any strong chemical cleaners.



In the U.S.A.: BOBRICK WASHROOM EQUIPMENT, INC.

200 Commerce Drive, Clifton Park, New York 12065-1350 • Tel: (518) 877-7444 • FAX: 518-877-5029
11611 Hart Street, North Hollywood, California 91605-5882 • Tel: (818) 982-9600 • FAX: 818-503-1102
225 Bobrick Drive, Jackson, Tennessee 38301-5635 • Tel: (901) 424-7000 • FAX: 901-424-7800

In Canada: BOBRICK WASHROOM EQUIPMENT OF CANADA LTD.