




Technical Data

STAINLESS STEEL CORNER GUARD

B-633

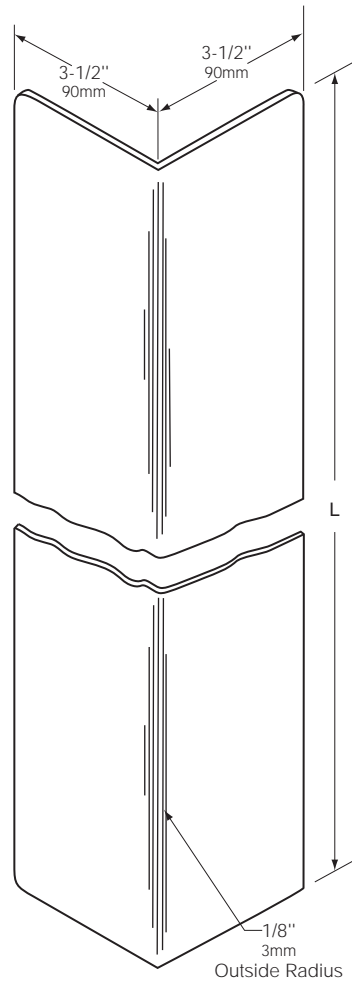

STANDARD STOCK SIZES

| L | MODEL NUMBER |
|--------------|--------------|
| 40" (1015mm) | B-633 x 40 |
| 48" (1220mm) | B-633 x 48 |

MATERIALS:

18-8 S, type-304, 18-gauge (1.2mm) stainless steel with satin finish. Corners are rounded. No sharp edges.

INSTALLATION:

Unit is furnished with special adhesive backing for easy and permanent mounting. Wall must be clean and dry. If necessary, remove all traces of grease and oil from wall surfaces using a good cleaning solvent. To install corner guard, remove paper backing from adhesive. Press corner guard firmly against wall. Wall temperature should not be less than 70°F for proper installation.

SPECIFICATION:

Corner guard shall be one-piece, 18-gauge (1.2mm), type-304 stainless steel with satin finish. Corners shall be rounded with no sharp edges. Corner guard shall be attached to wall surface with special pressure-sensitive adhesive furnished by manufacturer. Manufacturer's service and parts manual shall be provided to the building owner/manager upon completion of project.

Corner Guard shall be Model B-633 of Bobrick Washroom Equipment, Inc., Clifton Park, New York; Jackson, Tennessee; Los Angeles, California; Bobrick Washroom Equipment of Canada Ltd., Scarborough, Ontario; Bobrick Washroom Equipment Pty. Ltd., Australia; and Bobrick Washroom Equipment Limited, United Kingdom.