




Technical Data

# SURFACE-MOUNTED RETRACTABLE CLOTHESLINE

# B-636

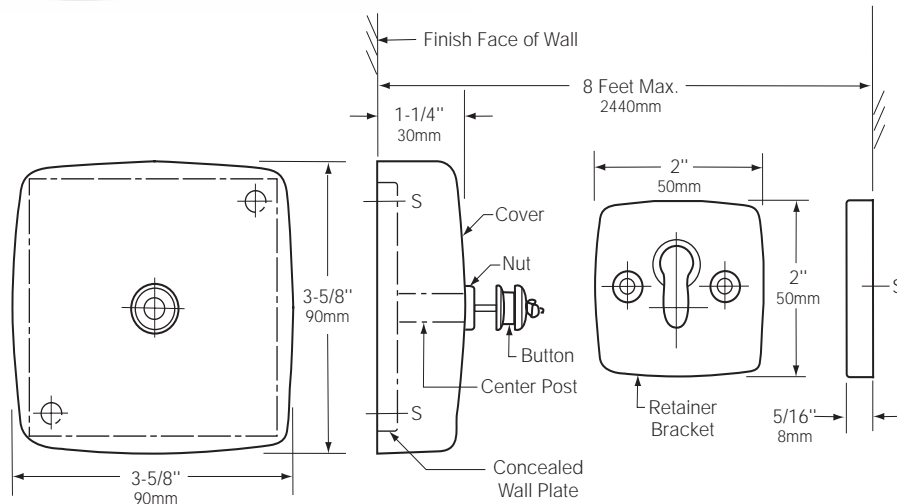

## MATERIALS:

**Cover** — 18-8 S, type-304, 24-gauge (0.6mm) stainless steel with bright polished finish. Drawn, one-piece seamless construction. Nut secures cover to center post of wall plate.

**Concealed Wall Plate** — 18-8 S, type-304, 20-gauge (0.9mm) stainless steel. Equipped with threaded center post, spring-actuated ABS reel, and 8-foot (2440mm) nylon cord.

**Retainer Bracket** — 18-8 S, type-304, 22-gauge (0.8mm) stainless steel with bright polished finish.

## OPERATION:

Pull out clothesline and hook button into retainer bracket on opposite wall. Nylon clothesline is retracted automatically by spring-actuated reel.

## INSTALLATION:

Mount wall plate with two sheet-metal screws, furnished by manufacturer, at points indicated by an S. Secure cover to center post of wall plate with nut; be sure nylon cord is threaded through center post, nut and button, and knotted as shown. Mount retainer bracket on facing wall with two sheet-metal screws furnished. For plaster or dry wall construction, provide concealed backing to comply with local building codes, then secure unit with sheet-metal screws. For other wall surfaces, provide fiber plugs or expansion shields for use with sheet-metal screws, or provide 1/8" (3mm) toggle bolts or expansion bolts.

## SPECIFICATION:

Surface-mounted retractable clothesline shall be type-304 stainless steel with bright polished finish. Unit shall have a button retainer bracket and 8-foot (2440mm) nylon cord that retracts on a spring-actuated reel. Manufacturer's service and parts manual shall be provided to the building owner/manager upon completion of project.

**Surface-Mounted Retractable Clothesline shall be Model B-636 of Bobrick Washroom Equipment, Inc., Clifton Park, New York; Jackson, Tennessee; Los Angeles, California; Bobrick Washroom Equipment of Canada Ltd., Scarborough, Ontario; Bobrick Washroom Equipment Pty. Ltd., Australia; Bobrick Washroom Equipment Limited, United Kingdom.**